

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International BureauCAO 48-25-28-10
Ser. No. 10/809881
Date Filed 3/25/04

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04Q 7/38	A1	(11) International Publication Number: WO 00/38456 (43) International Publication Date: 29 June 2000 (29.06.00)
(21) International Application Number: PCT/EP99/10085 (22) International Filing Date: 17 December 1999 (17.12.99) (30) Priority Data: PCT/IB98/02076 18 December 1998 (18.12.98) IB Not furnished 15 December 1999 (15.12.99) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventor: JETZEK, Ulrich; Gerngrosstrasse 72, D-90409 Nürnberg (DE). (74) Agent: MOHSLER, Gabriele; Ericsson Eurolab Deutschland GmbH, Ericsson Allee 1, D-52134 Herzogenrath (DE).	(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(54) Title: METHODS AND SYSTEMS FOR DYNAMIC THRESHOLD ADJUSTMENT FOR HANDOFFS IN RADIO COMMUNICATION SYSTEMS		
(57) Abstract A method and system for performing handoffs in radiocommunication systems using adaptively variable thresholds are described. Adaptive thresholds are functions of the quality level of a best or worst transmission source in an active set. Ramp functions can be employed over a range of quality values within the adaptive threshold functions.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

**METHODS AND SYSTEMS FOR DYNAMIC THRESHOLD
ADJUSTMENT FOR HANDOFFS
IN RADIO COMMUNICATION SYSTEMS**

BACKGROUND

5 The present invention relates generally to methods and systems for radiocommunications and, more particularly, to such systems in which a connection can be handed over from one channel or base station to another.

 The cellular telephone industry has made phenomenal strides in commercial operations in the United States as well as the rest of the world. Growth in major metropolitan areas has far exceeded expectations and is rapidly outstripping system capacity. If this trend continues, the effects of this industry's growth will soon reach even the smallest markets. Innovative solutions are required to meet these increasing capacity needs as well as maintain high quality service and avoid rising prices.

15 In cellular systems, the capability is typically provided to transfer handling of a connection between, for example, a mobile station and a base station to another base station, as the mobile station changes its position and so moves out of the coverage area of one base station and into the coverage area of another base station. This type of handoff is commonly referred to as an "intercell" handoff as the coverage areas associated with base stations are commonly referred to as "cells". Depending upon the quality of the current channel, it may also be desirable to transfer a connection from one channel of the base station to another channel supported by the same base station, which handoffs are commonly referred to as "intracell" handoffs.

25 So-called "hard" handoffs refer to handoffs which are performed wherein there is no significant overlap between transmissions received from an original, serving base station and transmissions received from a new, target base station.

As shown in Figure 1(a), during hard handoff, the mobile station (MS) typically first breaks its connection to its original base station (BTS1) and then establishes a connection to its new base station (BTS2).

By way of contrast, "soft" handoffs refer to handoffs wherein, for some period of time, a mobile station receives substantially the same information from two (or more) transmission sources. An exemplary soft handoff scenario is illustrated in Figure 1(b). Therein, before starting soft handoff, the MS is connected to BTS1. During the soft handoff, the MS establishes a connection to BTS2 without dropping the connection to BTS1. Each base station which is concurrently communicating with a particular mobile station may be referred to as a member of that mobile station's "active set". At some time after the connection to BTS2 is set up, the connection to BTS1 will be released which is the termination of the soft handover procedure. The overlapping transmissions from BTS1 and BTS2 permit the mobile station to smoothly switch from receiving information from its original, serving base station to receiving information from its new, target base station. During soft handoff, the mobile station may also take advantage of the fact that it is receiving substantially the same information from two sources to improve its received signal quality by performing diversity selection/combining of the two received signals.

For the sake of simplicity, the foregoing examples of the hard and soft handoff were described in the context of base stations employing omnidirectional antennas, i.e., wherein each base station transmits signals which propagate in a substantially circular direction, i.e., 360 degrees. However, as will be appreciated by those skilled in the art, other antenna structures and transmission techniques may also be employed in radiocommunication systems. For example, a cell can be subdivided into several sectors, e.g., into three sectors where each sector covers a 120 degree angle as shown in Figure 2. Alternatively, the system or cell may employ an array antenna structure as shown in Figure 3. Therein, an exemplary

radio communication system 200 includes a radio base station 220 employing a fixed-beam phased array (not shown). The phased array generates a plurality of fixed narrow beams (B_1 , B_2 , B_3 , B_4 , etc.) which radially extend from the base station 220, at least one of which (B_1) is used to communicate with MS 210.

- 5 Preferably, the beams overlap to create a contiguous coverage area to service a radio communication cell. Although not shown, the phased array can actually consist of three phased array sector antennas.

Of course, the principles described above with respect to hard and soft handoff for omnidirectional antennas in Figures 1(a) and 1(b) can be directly
10 mapped to other systems which employ sectorized and/or array antennas. In these latter types of systems, hard and soft handoffs can be performed between sectors or beams of the same base station as well as between sectors or beams associated with different base stations.

Both types of handoff have their drawbacks and advantages. On the one
15 hand, soft handoff provides a robust mechanism for changing the connection from one base station to another. However, since the mobile station is connected to more than one base station during soft handoff, soft handoff requires more system resources than hard handoff. An advantage of hard handoff, therefore, is a reduced need for system resources, while its drawback is a higher probability of
20 dropped calls when compared to soft handoff.

Both hard and soft handoffs may be employed in radiocommunication systems using any type of access methodology, e.g., Frequency Division Multiple Access (FDMA), Time Division Multiple Access (TDMA), Code Division
25 Multiple Access (CDMA), or any hybrid thereof. For the purposes of illustration, rather than limitation, this description shall primarily describe conventional techniques and techniques according to the present invention in terms of CDMA systems, however those skilled in the art will appreciate that the inventive techniques are equally applicable to systems employing any access methodology.

In radiocommunication systems employing a CDMA access technique, a mobile station can be concurrently connected to one or more sectors that belong to one or more base stations. As mentioned above, the sectors which the mobile station uses for communication are called "active set". Consider, as an example, the system
5 illustrated in Figure 4 having cells C1 and C2 with the sectors S1. . . S6 each. Let A, B and E denote the sectors C1-S1, C1-S2 and C2-S5, respectively, that the mobile station 400 is connected to, i.e., mobile station 400's active set.

Due to the movement of the mobile station 400 (and possibly other influences), the quality of each connection is time variant. Quality in this context
10 refers to one or more specific types of measurement, e.g., the received signal strength or the downlink signal-to-interference ratio. To adapt to the time variance in quality of a connection, the mobile station 400 is provided with a set of sectors whose transmissions are to be monitored with respect to their received signal quality. This set is called the measurement set. By periodically evaluating the
15 quality of the sectors in the measurement set, the mobile station 400 identifies a set of sectors that are suitable to be members of the active set, referred to as the candidate set. When the membership of the current active set and that of the candidate set differ from each other, the mobile station 400 sends a measurement report to the system, e.g., to a radio network controller (RNC, not shown). The
20 measurement report contains information regarding the quality of transmission received from the sectors of the candidate set. The RNC then decides whether to perform a hard or soft handover, i.e., which sectors shall be added to and/or deleted from the active set. The RNC also requests setup and release of radio and network resources for the connection between the mobile station and the relevant
25 base station(s) in order to perform the handoff. After the handoff has been accomplished, the contents of the active set are updated in the mobile station (and the RNC).

However, there exist a number of different techniques by which to evaluate whether, based on the measurements reported by the mobile station to the system, a handoff is desirable and, if so, what type of handoff. Some of these techniques used fixed thresholds, while others use dynamic thresholds. For example, U.S. Patent No. 5,422,933 describes a method and system for handing off an ongoing communication from a serving cell to a neighboring cell of a cellular communication system. A dynamic threshold is calculated for effecting handover in accordance with various operating conditions. The current mobile minimum attenuation level, the minimum permissible attenuation level of a serving cell and a neighboring cell, together with the RF signal strength of the mobile unit at the neighboring cell and the serving cell are used in calculating the dynamic threshold.

Another example can be found in U.S. Patent No. 5,483,669, which patent describes a method and system for handing off an on-going communication from a sending to a neighboring cell of a cellular communication system. A dynamic threshold is calculated for effecting the handoff, for example based on a minimum attenuation level of the mobile unit and a minimum level permitted by a neighboring cell. These latter two systems, however, suffer from the drawback that the determination of the dynamic threshold is rather complex due to the number of cases to be considered and that there is no provision for handling soft handoff.

More recently, a proposal has been described for a CDMA system known as CDMA 2000. Within the CDMA 2000 documentation there is a description of dynamic thresholds used for soft handoff. According to this description, a forward pilot channel is added to the candidate set if a measured quality level exceeds a given static threshold T1. The candidate set contains the sectors that are evaluated more frequently and that are tested against a second dynamic threshold T2. The dynamic threshold T2 is calculated based on using the sum of the received signal quality measurements for all pilot channels in the active set. However, this

scheme suffers from the limitation that it is only provided for the forward link (i.e., the downlink), is also rather complex and requires a two-step (i.e., evaluation with respect to static and dynamic threshold) procedure for addition and deletion of sectors to and from the active set.

- 5 Accordingly, there is a need to develop enhanced techniques to determine when a handoff is appropriate, and which type of handoff is appropriate, to efficiently utilize system resources under different operating conditions.

SUMMARY

- 10 These, and other, problems, drawbacks, and limitations of conventional handoff techniques, are overcome according to the present invention in which adaptive thresholds can be provided for a variety of different thresholds used in evaluating the desirability of both soft and hard handoffs. According to exemplary embodiments, soft handoff thresholds for adding, deleting and replacing members of the active set vary based on a quality level of a best or worst member of the
- 15 current active set. Similarly, a threshold used to determine when a hard handoff is desirable can also be made variable based on a quality level of an active set member.

- 20 The present invention provides a number of benefits as compared with conventional techniques for performing handoffs including: (1) flexibly controlling both hard and soft handoffs, (2) less complex threshold calculation that is, at the same time, dynamic in nature so as to vary with changes in channel quality, (3) a reduction in the average number of sectors (or other types of transmission sources, e.g., beams) that a mobile station is concurrently connected to, (4) providing a mechanism for controlling the relative number of soft and hard handoffs by
- 25 selection of the minimum and maximum threshold values and the slopes in the adaptive threshold functions, (5) a reduction in the probability of dropped calls as compared to conventional techniques which employ higher, fixed handoff

thresholds and (6) a reduction in interuser interference as compared to conventional techniques which employ case that employ lower, fixed thresholds such that the active set contains a relatively high number of sectors.

BRIEF DESCRIPTION OF THE DRAWINGS

5 The foregoing, and other, objects, features and advantages of the present invention will be more readily understood upon reading the following detailed description in conjunction with the drawings in which:

Figure 1(a) is an illustration of hard handoff;

Figure 1(b) is an illustration of soft handoff;

10 Figure 2 depicts a base station employing sector antennas;

Figure 3 shows a base station employing an array antenna;

Figure 4 is an illustration of two, six sectored cells in communication with a mobile station;

Figure 5 depicts a portion of an exemplary mobile station structure;

15 Figure 6 is a graph illustrating various handoff algorithm conditions for adding, deleting and replacing sectors according to an exemplary embodiment of the present invention;

Figure 7 is a graph illustrating algorithm conditions for hard handoff according to an exemplary embodiment of the present invention; and

20 Figure 8 is a graph depicting a variable add threshold according to an exemplary embodiment of the present invention.

DETAILED DESCRIPTION

In the following description, for purposes of explanation and not limitation, specific details are set forth, such as particular circuits, circuit components, techniques, etc. in order to provide a thorough understanding of the invention.
25 However it will be apparent to one skilled in the art that the present invention may

be practiced in other embodiments that depart from these specific details. In other instances, detailed descriptions of well-known methods, devices, and circuits are omitted so as not to obscure the description of the present invention with unnecessary details.

5 Prior to describing the details of the present invention, a partial example of the construction of a mobile station which can operate to perform the signal quality measurements described above is illustrated in Figure 5. This block diagram has been simplified to illustrate only those components relevant to the measurement of downlink signal strength, however those skilled in the art will be well aware of the
10 other major functional blocks associated with mobile stations. In Figure 5, incoming radio signals are received by transmitter/receiver TRX 500. The timing is synchronized to the received symbol sequence by microprocessor controller 530. The strength of the received signals are measured by a signal strength measuring part 520, the value of which is then passed to microprocessor controller 530. The
15 bit error rate (BER) of the received signal can also be determined as an indication of received signal quality as reflected by block 540. This measurement of received signal quality is particularly relevant in determining when an intracell handoff is desirable. Those skilled in the art will appreciate that other quality measures, e.g., signal-to-interference ratio, can also be used in handoff algorithms. The mobile
20 station will also have input/output devices, such as a keyboard and display 535, as well as a microphone and speaker unit (not shown), which enables information to be exchanged between the mobile station and the base station.

When the mobile station receives a list of channel numbers and/or codes in a MAHO (mobile assisted handover) command, it will measure the received signal
25 quality associated with each of those channels. Once the mobile station has made the requested measurements, it will report them to the system which will then evaluate the various sectors using a handoff algorithm. An example is provided in Figure 6 to illustrate how the active set may change over time based on applying a

handoff algorithm to these measurements. In Figure 6, it is assumed that only sector A (e.g., as shown in Figure 4) belongs to the active set at the beginning. The measurement set in this example contains all sectors of the active set and all the neighbors of the active set. As only sector A is a member of the active set in this example, the measurement set consists of sectors C1-S1(=A), C1-S2(=B), C1-S6(=C).

For this example, the handoff algorithm dictates that different handoff actions will be triggered according to the conditions stated below:

1. Add a sector: A sector X is added to the current active set if its quality Q_x meets the following condition:

$$Q_x > Q_{best} - \text{add_th}$$

where Q_{best} represents the quality of the sector with the best quality in the Active Set and add_th is a threshold value. For example, as shown in Figure 6, sector B is added to the active set at the time instant marked 'Add B' since the difference between its quality level and the quality level received from sector A is equal to add_th . Note that after time 'Add B', sector D (C1-S3) is added to the measurement set because it is a neighbor to sector B.

2. Delete a sector: A sector X is deleted from the current active set if its quality Q_x meets the following condition:

$$Q_x < Q_{best} - \text{delete_th}$$

where delete_th represents the deletion threshold. An example of this condition occurring may be found at time instant marked 'Remove C' in Figure 6, wherein sector C is removed from the active set since the difference between its received quality level and that of sector B exceeds delete_th .

3. Replace a sector: A sector X replaces the sector with the worst quality in the active set if the active set is full and the following condition holds:

$$Q_x > Q_{\text{worst}} + \text{replace_th}$$

where replace_th represents the threshold used for sector replacement. Provided that the maximum number of sectors in the active set is two in Figure 6, sector C should replace sector A at time instant marked 'Replace A with C' in Figure 6. The actions described in this handoff algorithm to add, delete or replace a sector occur as soft handoffs in this example, unless the hard handoff threshold is exceeded in which case hard handoff takes precedence.

10 4. Perform a hard handover: A hard handover from the current active set to a new sector is carried out if the quality Q_x of sector X fulfills the following condition:

$$Q_x > Q_{\text{best}} + \text{hho_th}$$

where hho_th represents the threshold used for hard handover, i.e., all connections of the current active set will be removed and a new connection to sector X will be set up. In this regard, it should be noted that the mobile station will typically not have the possibility to measure the quality of all sectors in the measurement set continuously and, similarly, will not have the possibility to send measurement reports to the network continuously. Instead, the mobile station will perform measurements periodically, e.g., as represented by the dashed vertical lines in Figure 7, by measuring the quality of the sectors in the measurement set at specific time instants. If the quality of a measured sector increases rather slowly, either a sector replacement (if the active set is full) or a sector addition (if the active set is not full) will be performed. In such a case, i.e., a slow quality increase of a measured sector, a sector's quality may never exceed the hard handoff threshold with respect to the best active set sector quality.

On the other hand, the sector quality of a measured sector may increase very rapidly. This might occur, for example, if the mobile station measures a specific sector that has poor quality due to the shadowing effects caused by a building or other obstacle. When the mobile station moves out of the shadowing area, the mobile station may then have a direct line of sight with the base station of the measured sector. This will lead to a rapid quality increase for the measured sector.

This latter scenario is illustrated in Figure 7. Therein, the mobile station's active set includes sectors A and B after time "Add B". The quality of sector C, however, remains relatively low such that sector C will neither replace the worst sector in the active set nor will it be added to the active set. Then, as seen in the Figure, the measured quality of sector C increases very rapidly, at which time a hard handover to sector C is performed.

While the aforescribed exemplary handoff technique has some advantages as compared with the techniques described in the Background section of this specification, e.g., it is easier to implement since it is a straightforward one-step procedure and it is more flexible since it can be applied to soft and hard handoff, it is also limited by its usage of fixed threshold values. However, using fixed thresholds means that this the handoff algorithm is not able to adapt to changes in the transmission quality in different channels and will therefore inefficiently handle radio and network resources. For example, if the fixed handoff thresholds are set very tightly, such that a sector in the measurement set must have relatively good quality before being added to the active set, then the mobile station might lose its connection if it does not identify any sectors as being good enough for the active set, which means that the handoff algorithm will unnecessarily increase the dropped call probability. Alternatively, if the thresholds are set rather loosely, such that sectors are more likely to be added to the active set, the mobile station will be more likely to be connected to a large number of sectors and will therefore

allocate more system resources (e.g., short codes) than are really needed to maintain the connection. Moreover, when the thresholds for soft handoff (add_th, delete_th, replace_th) and the threshold for hard handoff (hho_th) are set to a fixed value, the system cannot control the rate of soft handoffs relative to hard handoffs.

Therefore, according to exemplary embodiments of the present invention, the thresholds, e.g., add_th, delete_th, replace_th and hho_th, employed in making hard and soft handoff decisions may all be dynamically adjusted based on, for example, the current sector quality of the best (Q_{best}) and the worst sector (Q_{worst}) in the active set, respectively, during an observation time t . Therefore, according to this exemplary embodiment, the thresholds will be functions $f_{(.)}$ of the following variables:

$$\begin{array}{lll}
 \text{add_th} & = & f_{\text{add}}(Q_{\text{best}}, t) \\
 \text{delete_th} & = & f_{\text{delete}}(Q_{\text{best}}, t) \\
 \text{replace_th} & = & f_{\text{replace}}(Q_{\text{worst}}, t) \\
 \text{hho_th} & = & f_{\text{hho}}(Q_{\text{best}}, t)
 \end{array}$$

The computation of each dynamic threshold reflects the current transmission situation, i.e., the active set can be reduced to a few sectors (or possibly one sector) if the transmission situation is good and will be increased if the transmission situation gets worse. In addition to this, the computation of each dynamic threshold depends only on the quality of one sector of the active set, i.e., Q_{best} or Q_{worst} , and a few other fixed system parameters and is, therefore, relatively straightforward to calculate. According to exemplary embodiments of the present invention described below, the complexity of handoff algorithms according to the present invention is further reduced by using adaptive threshold functions which are linear within different intervals.

According to the examples provided herein, the thresholds add_th, delete_th, replace_th and hho_th are ramp functions. Although useful due to their low computational complexity, those skilled in the art will appreciate that such thresholds may be implemented using any function, linear or non-linear, other than ramp functions that permits adaptation based on changing quality conditions in the radio channels. In the following discussion, however, a brief description of exemplary threshold functions is provided wherein the thresholds are ramp functions over a certain range of quality values, and remain at a constant high and low value outside this range, respectively. An illustration of an exemplary threshold function for add_th is provided as Figure 8. Since add_th is a function of Q_{best} , the graph depicts varying values for add_th based on the current quality of Q_{best} . When the quality of Q_{best} is lower than Q_{add_low} , then add_th has its highest value of max_add_th. Within the range between Q_{add_low} and Q_{add_high} , the value of add_th is determined based on the ramp function 700. Although the ramp function 700 has a negative slope, it will be appreciated that other threshold functions may employ ramp functions having a positive slope. If the quality of Q_{best} is Q_{add_high} or higher, then add_th is set to its lowest value of min_add_th.

Specific, yet still exemplary and illustrative, threshold functions are described below mathematically for add_th, delete_th, replace_th and hho_th. In these equations it is assumed that the sector quality, the threshold values, and all other values described below are in dB units. The other assumptions for the threshold functions are as follows:

- xxx_slope is the slope of the ramp function, where $xxx_slope > 0$ (xxx=add, delete, rep or hho);
- max_xxx_th is greater than min_xxx_th; and
- Q_{xxx_high} is greater than Q_{xxx_low}

Variable Add Threshold Function

if $Q_{best} < Q_{add_low}$, then $add_th = max_add_th$;
 if $Q_{add_low} \leq Q_{best} \leq Q_{add_high}$,
 then $add_th = max_add_th - add_slope * (Q_{best} - Q_{add_low})$;
 5 if $Q_{best} > Q_{add_high}$, then $add_th = min_add_th$;
 where Q_{add_low} , Q_{add_high} , min_add_th , max_add_th and add_slope are set to fixed values.

Variable Delete Threshold Function

if $Q_{best} < Q_{delete_low}$, then $delete_th = max_delete_th$;
 10 if $Q_{delete_low} \leq Q_{best} \leq Q_{delete_high}$,
 then $delete_th = max_delete_th - delete_slope * (Q_{best} - Q_{delete_low})$;
 if $Q_{best} > Q_{delete_high}$, then $delete_th = min_delete_th$;
 where Q_{delete_low} , Q_{delete_high} , min_delete_th , max_delete_th and $delete_slope$ are set to fixed values.

15 Variable Replace Threshold Function

 if $Q_{worst} < Q_{rep_low}$, then $replace_th = min_replace_th$;
 if $Q_{rep_low} \leq Q_{worst} \leq Q_{rep_high}$,
 then $replace_th = min_replace_th - replace_slope * (Q_{rep_low} - Q_{worst})$;
 if $Q_{worst} > Q_{rep_high}$, then $replace_th = max_replace_th$;
 20 where Q_{rep_low} , Q_{rep_high} , min_rep_th , max_rep_th and rep_slope are set to fixed values.

Variable Hard Handoff Threshold

 if $Q_{best} < Q_{hho_low}$, then $hho_th = max_hho_th$;
 25 if $Q_{hho_low} \text{ dB} \leq Q_{best} \leq Q_{hho_high}$,
 then $hho_th = max_hho_th - hho_slope * (Q_{best} - Q_{hho_low})$;

if $Q_{\text{best}} > Q_{\text{hho_high}}$, then $\text{hho_th} = \text{min_hho_th}$;

where $Q_{\text{hho_low}}$, $Q_{\text{hho_high}}$, min_hho_th , max_hho_th and hho_slope are set to fixed values.

By dynamically adjusting the various handoff thresholds in this manner, as
5 the quality of transmissions from the best sector increases, fewer sectors will be added to the active set and, therefore, system resources will be saved. Conversely, as the quality of transmissions from the best sector deteriorates, more sectors will be added to the active set and, therefore, the overall quality of the connection can be maintained at a desirable level. In addition, the higher the
10 quality of the transmissions from the best sector, the more likely a hard handoff will be, which also contributes to an efficient use of system resources.

It will therefore be appreciated that the present invention provides a number of benefits as compared with conventional techniques for performing handoffs including: (1) flexibly controlling both hard and soft handoffs, (2) less complex
15 threshold calculation that is, at the same time, dynamic in nature so as to vary with changes in channel quality, (3) a reduction in the average number of sectors (or other types of transmission sources, e.g., beams) that a mobile station is concurrently connected to, (4) providing a mechanism for controlling the relative number of soft and hard handoffs by selection of the minimum and maximum
20 threshold values and the slopes in the adaptive threshold functions, (5) a reduction in the probability of dropped calls as compared to conventional techniques which employ higher, fixed handoff thresholds and (6) a reduction in interuser interference as compared to conventional techniques which employ case that employ lower, fixed thresholds such that the active set contains a relatively
25 high number of sectors.

The above-described exemplary embodiments are intended to be illustrative in all respects, rather than restrictive, of the present invention. For example, although the preceding exemplary embodiments do not reference multiple

frequency bands, it will be apparent to those skilled in the art that the present invention is applicable to systems employing multiple frequency bands for communication and, therefore, to either intrafrequency or interfrequency band handoff. Thus the present invention is capable of many variations in detailed
5 implementation that can be derived from the description contained herein by a person skilled in the art. All such variations and modifications are considered to be within the scope and spirit of the present invention as defined by the following claims.

WHAT IS CLAIMED IS:

1. A method for controlling membership in an active set comprising the steps of:
 - providing a plurality of thresholds for controlling membership in said
 - 5 active set including:
 - a first threshold for determining when to add a transmission source to said active set;
 - a second threshold for determining when to delete a transmission source from said active set;
 - 10 a third threshold for determining when to replace a member of said active set with another transmission source; and
 - a fourth threshold for determining when to perform a hard handoff from at least one current member of said active set to another transmission source;
 - 15 varying a value of at least one of said plurality of thresholds as a function of a quality level associated with a member of said active set; and
 - controlling membership in said active set based on a result of said varying step.
2. The method of claim 1, wherein said at least one of said plurality of
- 20 thresholds is said first threshold which varies as a non-constant function of a quality level of a transmission source having a best quality level in said active set.
3. The method of claim 2, wherein said non-constant function includes a ramp function between a maximum and a minimum value of said first threshold.

4. The method of claim 1, wherein said at least one of said plurality of thresholds is said second threshold which varies as a non-constant function of a quality level of a transmission source having a best quality level in said active set.

5. The method of claim 4, wherein said non-constant function includes a
5 ramp function between a maximum and a minimum value of said second threshold.

6. The method of claim 1, wherein said at least one of said plurality of thresholds is said third threshold which varies as a non-constant function of a quality level of a transmission source having a worst quality level in said active set.

10 7. The method of claim 6, wherein said non-constant function includes a ramp function between a minimum and a maximum value of said third threshold.

8. The method of claim 1, wherein said at least one of said plurality of thresholds is said fourth threshold which varies as a non-constant function of a quality level of a transmission source having a best quality level in said active set.

15 9. The method of claim 8, wherein said non-constant function includes a ramp function between a maximum and a minimum value of said fourth threshold.

10. A control node in a radiocommunication system comprising:
a receiver for receiving signal quality measurements reported by a
mobile station; and
a processor for determining whether a handoff is desirable for said
mobile station based upon an evaluation of said signal quality measurements and a
5 plurality of adaptive thresholds whose values vary based upon a quality level
associated with a transmission source in said mobile station's active set.
11. The control node of claim 10, wherein said plurality of adaptive
thresholds include:
10 a first threshold for determining when to add a transmission
source to said active set; and
a second threshold for determining when to delete a transmission
source from said active set.
12. The control node of claim 10, wherein said plurality of adaptive
15 thresholds includes at least one adaptive threshold that varies as a non-constant
function of a quality level of a transmission source having a best quality level in
said active set.
13. The control node of claim 12, wherein said non-constant function
20 includes a ramp function between a maximum and a minimum value of said at least
one adaptive threshold.
14. The control node of claim 10, wherein said transmission source is
one of a cell, a base station, a sector antenna and a beam associated with an
antenna array.

15. The control node of claim 10, wherein said plurality of adaptive thresholds include:

a threshold for determining when to replace a member of said active set with another transmission source.

5 16. The control node of claim 10, wherein said plurality of adaptive thresholds include:

a threshold for determining when to perform a hard handoff from at least one current member of said active set to another transmission source.

10 17. The control node of claim 10, wherein said control node is a switching node.

18. A system for controlling membership in an active set comprising:
a first threshold means for determining when to add a transmission source to said active set;

15 a second threshold means for determining when to delete a transmission source from said active set;

means for varying a value of at least one of said first and second threshold means as a function of a quality level associated with a member of said active set; and

20 means for controlling membership in said active set as a result of said varying means.

19. The system of claim 18, further comprising:

a third threshold means for determining when to replace a member of said active set with another transmission source, wherein said means for varying varies at least one of said first, second and third threshold.

20. The system of claim 18, further comprising:



a third threshold means for determining when to perform a hard handoff from at least one current member of said active set to another transmission source, wherein said means for varying varies at least one of said first, second and third
5 threshold means.

21. The system of claim 18, wherein said value of at least one of said first and second threshold means is a value of said first threshold means which varies as a non-constant function of a quality level of a transmission source having a best quality level in said active set.
10

22. The system of claim 21, wherein said non-constant function includes a ramp function between a maximum and a minimum value of said first threshold.

23. The system of claim 18, wherein said value of at least one of said first and second threshold means is a value of said second threshold means which varies
15 as a non-constant function of a quality level of a transmission source having a best quality level in said active set.

24. The system of claim 23, wherein said non-constant function includes a ramp function between a maximum and a minimum value of said second threshold.

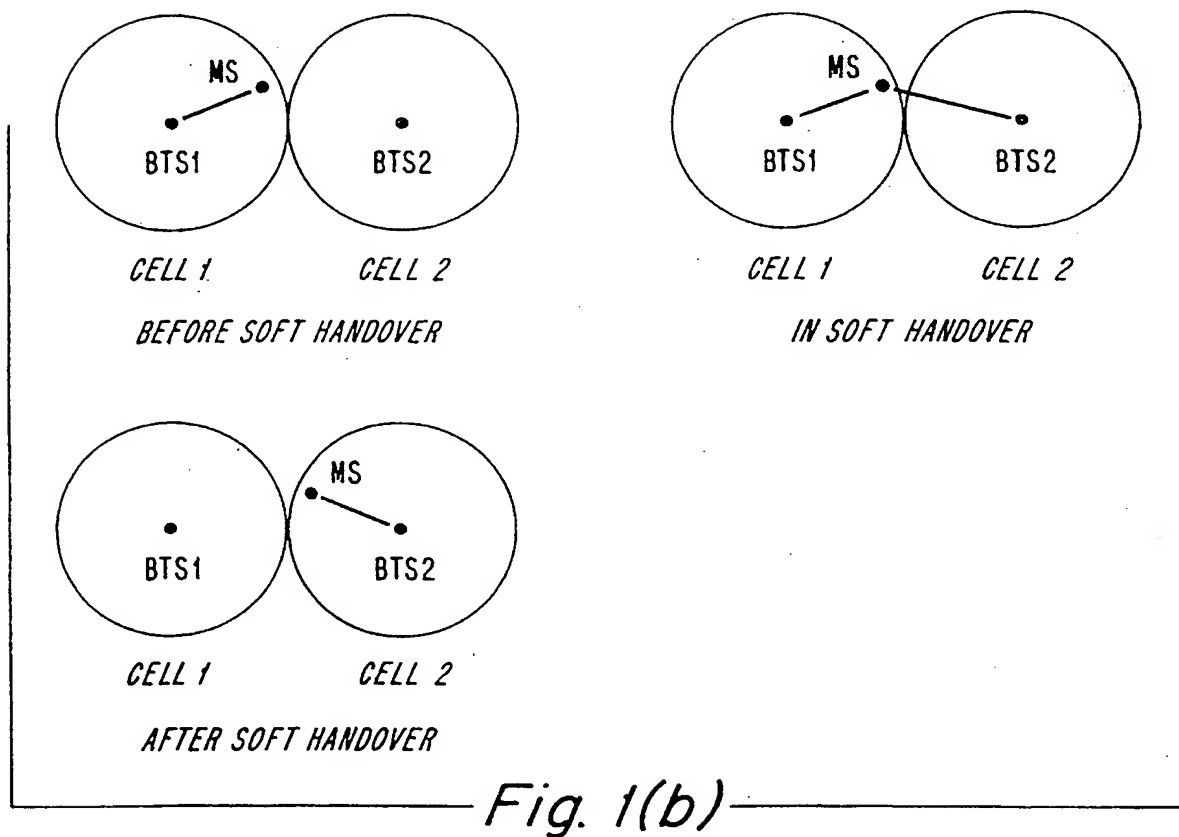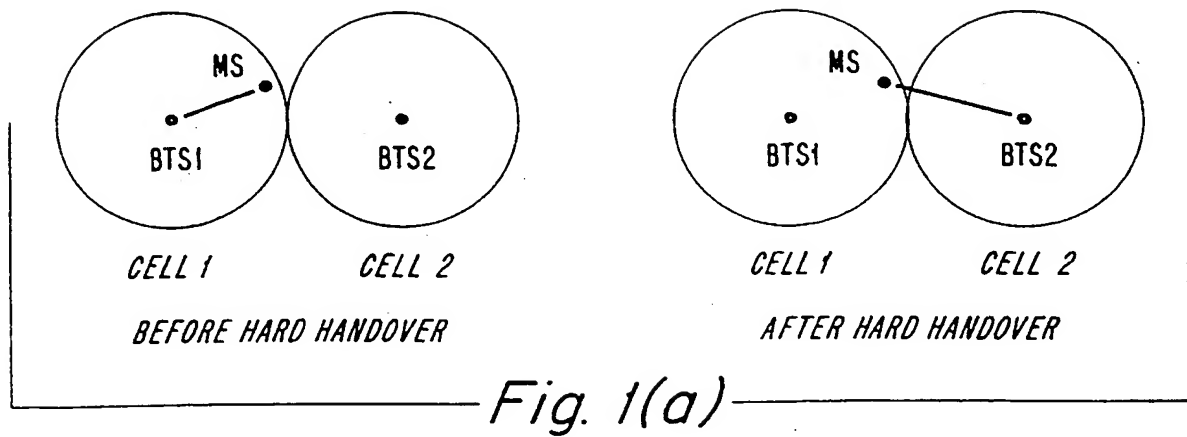

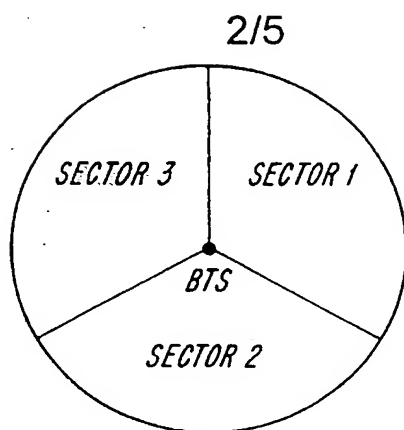


Fig. 2

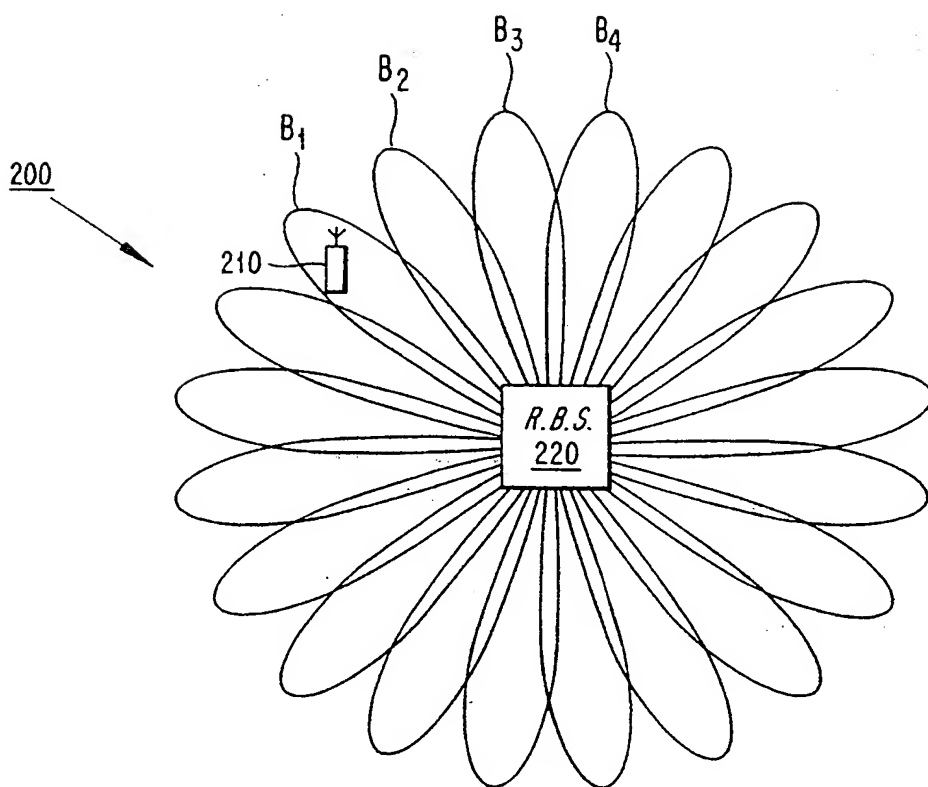


Fig. 3

3/5

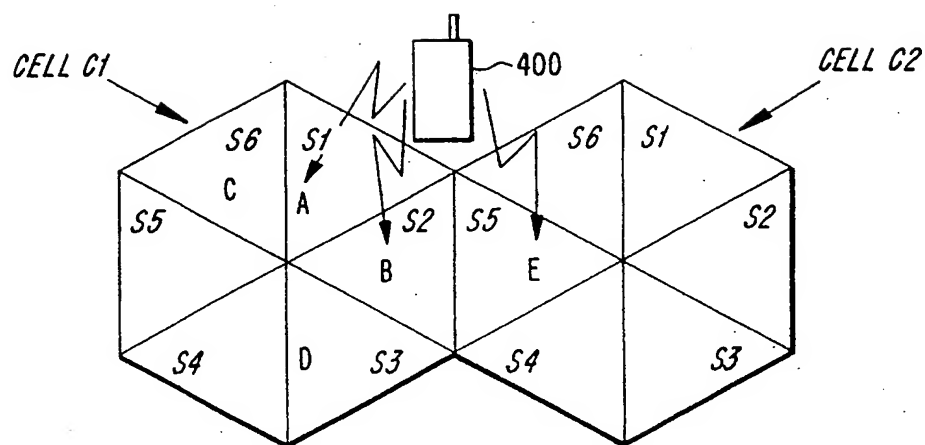


Fig. 4

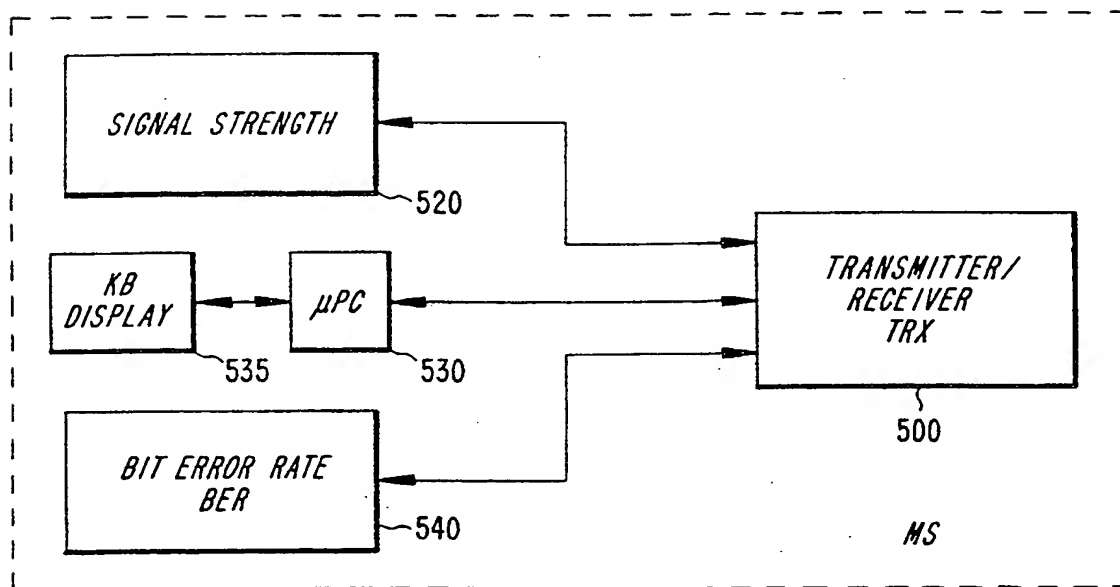


Fig. 5

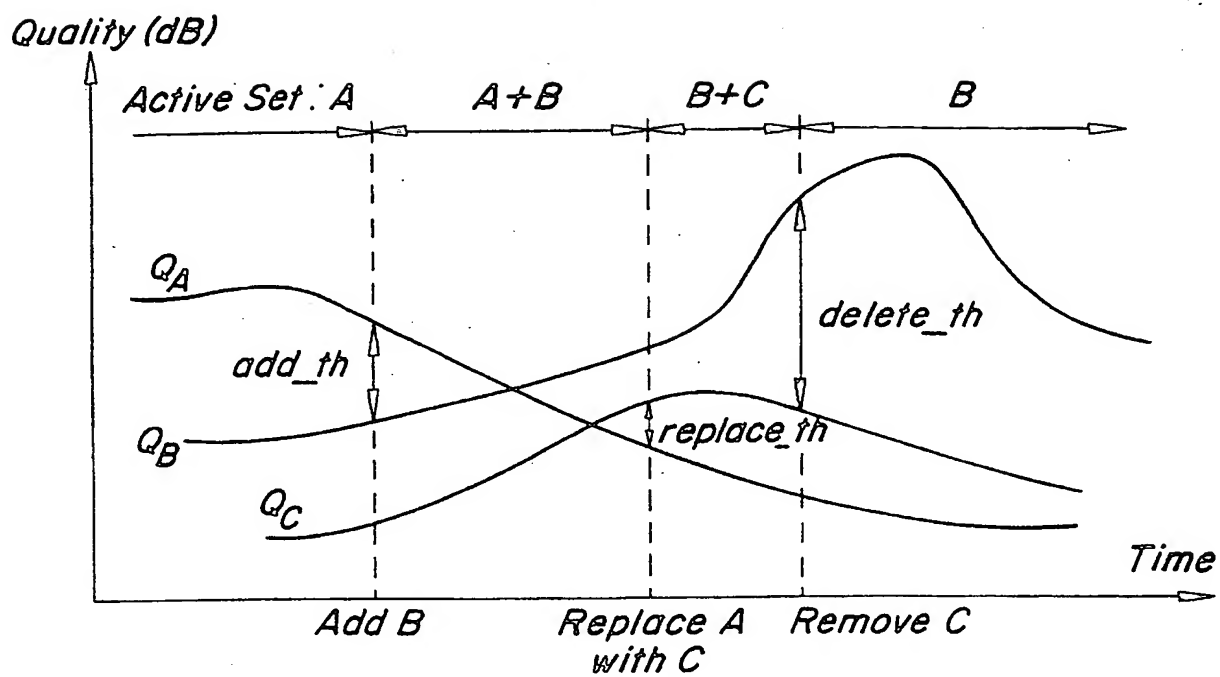


Fig. 6

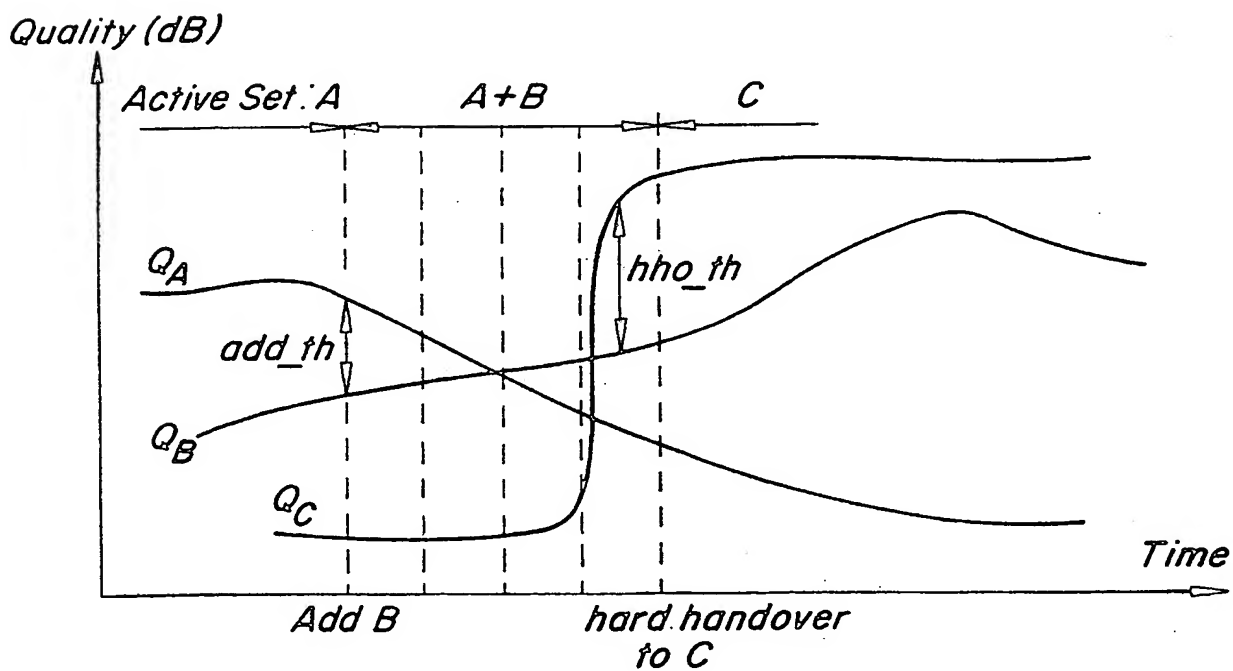
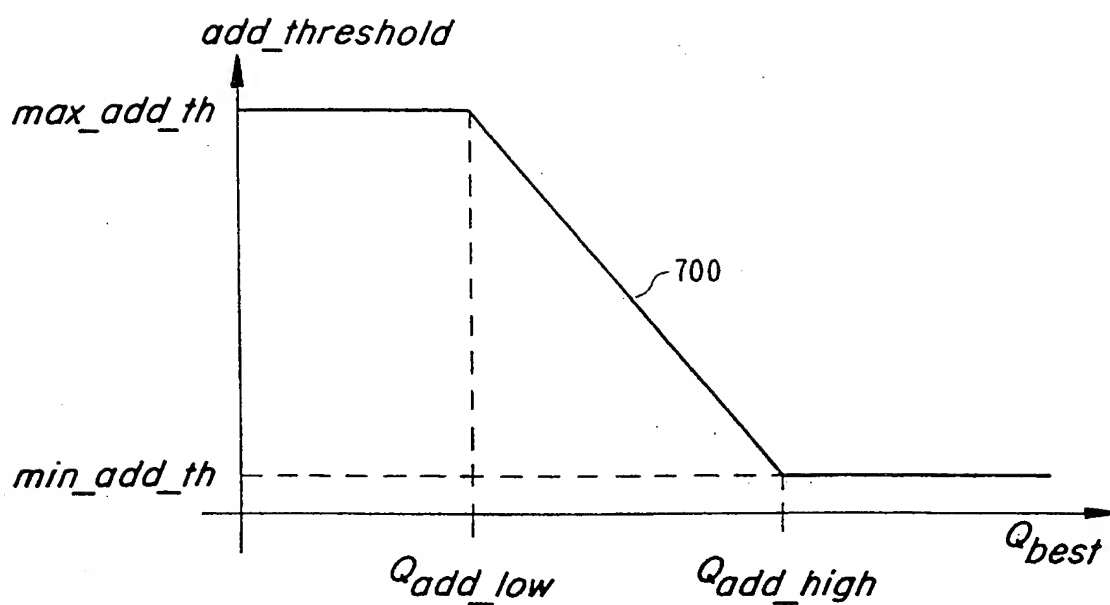


Fig. 7

*Fig. 8*

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/10085

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04Q7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,Y	WO 99 04593 A (QUALCOMM INC.) 28 January 1999 (1999-01-28) abstract; figures 5-7 page 9, line 24 -page 11, line 39	1,10,18
Y	US 5 577 022 A (PADOVANI ET AL.) 19 November 1996 (1996-11-19) figures 3,5A,5B,7 column 12, line 13 -column 13, line 57	1,10,18
A	US 5 640 414 A (BLAKENEY, II ET AL.) 17 June 1997 (1997-06-17) figures 5-7 column 18, line 45 - line 65 column 21, line 15 - line 51	1

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of a citation or other special reason (as specified in the international filing date but later than the date of publication of the international search)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published after the international filing date but later than the date of publication of the international search

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the international search report

12 April 2000

Date of mailing of the international search report

25/04/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2.
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Danielidis, S

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 99/10085

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 287 858 A (MOTOROLA LTD.) 27 September 1995 (1995-09-27) abstract page 6, line 33 -page 7, line 34	1, 10, 11
A	GB 2 313 740 A (MOTOROLA LTD.) 3 December 1997 (1997-12-03) abstract; figures 1-3 page 7, line 4 -page 8, line 29	1
A	US 5 483 669 A (BARNETT ET AL.) 9 January 1996 (1996-01-09) cited in the application the whole document	1
A	US 5 422 933 A (BARNETT ET AL.) 6 June 1995 (1995-06-06) cited in the application the whole document	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 99/10085

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9904593	A	28-01-1999	AU 8492098 A	10-02-1999
US 5577022	A	19-11-1996	AU 692669 B	11-06-1998
			AU 4594596 A	17-06-1996
			BR 9510068 A	30-12-1997
			CA 2203256 A	30-05-1996
			EP 0793895 A	10-09-1997
			FI 971592 A	22-07-1997
			JP 10509293 T	08-09-1998
			NO 972306 A	21-05-1997
			NZ 300717 A	26-01-1998
			WO 9616524 A	30-05-1996
			ZA 9509883 A	09-07-1996
US 5640414	A	17-06-1997	US 5267261 A	30-11-1993
GB 2287858	A	27-09-1995	CA 2143539 A	22-09-1995
			CA 2145044 A	22-09-1995
			CN 1123997 A	05-06-1996
			CN 1120790 A	17-04-1996
			DE 19509273 A	12-10-1995
			DE 19510256 A	28-09-1995
			FR 2717650 A	22-09-1995
			FR 2717651 A	22-09-1995
			HK 1009667 A	04-06-1999
			SE 9500961 A	22-09-1995
			SE 9500978 A	22-09-1995
			US 5722072 A	24-02-1998
GB 2313740	A	03-12-1997	NONE	
US 5483669	A	09-01-1996	NONE	
US 5422933	A	06-06-1995	NONE	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.